


Air conduction and diffusion through textile duct

Crystal Line

Technical Specification Sheet

PVC material

Weight	13.2 oz/sq.yd
Tensile strength	
FS 5102(strip)	46x44 lbs/inch
Tearing strenght	
FS 5134 (tongue)	58x58 lbs
Adhesion	
FS- 5970	7 lbs/inch
Cold crack	
MIL-C-20696-C	-22 °F
Width	
60, 72, 80 inch	
Roll Length	
50~100 YDS	

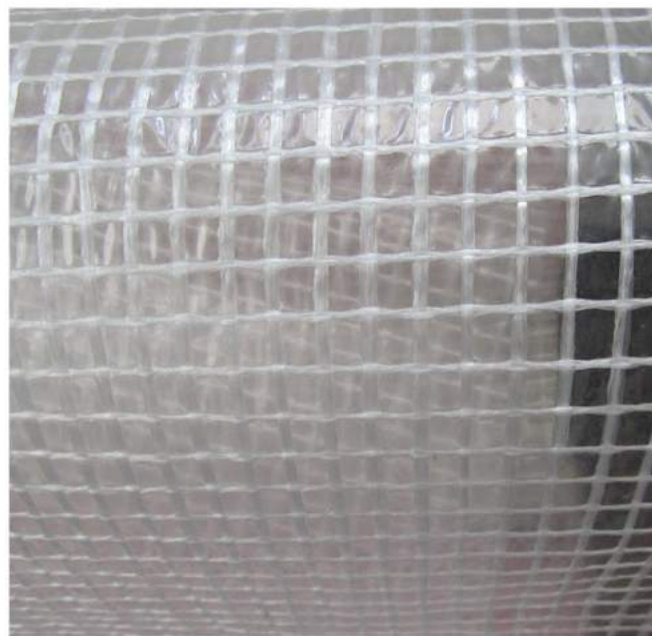

Available colours

2018



White

Pantone 469
 Ral 1013

This material is made of a polyester-fiber weft coated on both sides with a PVC film of varying densities, which gives it unparalleled strength and durability. The merge of the weft and the density of the coating layer results in outstanding mechanical strength.

Ideal for:

- Greenhouses
- Food industries
- Engine rooms
- Shopping centers

Clean with
 a damp cloth
 Pressurized air



Additional
 Information

Additional application
 Antistatic
Recommended use
 Internal / External
 • Self-extinguishing



Warranty