


## DATA SHEET 20-74-T MATERIAL

### Product Name: 20-74-T

Textile material: Polyester + PVC  
Weight: 20.74 oz/yd<sup>2</sup>, 700 g/m<sup>2</sup>  
Tear Strength NMX-A-109-INNTEX-2005  
Warp: 67 lbf / 300 N  
Weft: 67 lbf / 300 N  
Tensile Strength NMX-A-059/2-INNTEX-2008  
Warp: 674 lbf / 3000 N  
Weft: 674 lbf / 3000 N  
Permeability ASTM-D737-04: NONE  
Vertical Flammability ASTM-D-6413-08  
Adhesion: 20  
Crack resistance: 10,000 T-no cracks  
Light Fastness: >6  
White index: >90  
Solar transmission: 9/9  
Solar reflection: 83/81  
Solar absorption: 8/10  
UV transmission: 0  
Shading coefficient Fc, single glazing: 0.12 / 0.30  
Solar reflectance index (SRI): 114  
Global thermal resistivity, R-value: 0.175/0.206  
Global thermal conductivity, U-value: 5.711/ 4.852  
Cold resistance: -40  
Heat resistance: +70

**Fabric made in**

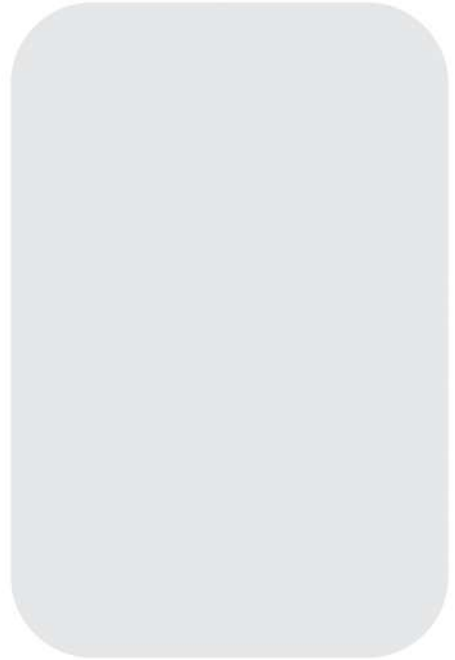

White  
Pantone 11-0601 TCX

**Non-Permeable Fabric**

